

TWO-COLOUR SIGNAL LAMPS MD22DUO

DATA SHEET

no: KK-MD22DUO




Two-colour signal lamps of MD22DUO series (plastic body, monoblocks) are installed in standardized assembly holes $\varnothing 22.5\text{mm}$, which are drilled in panels, control and signal boards, or directly in bodies of equipment and machines.

TECHNICAL DATA:


Parameter	Value
Insulation rated voltage U_i	250V
Rated voltage U_e MD22DUO24 MD22DUO230	12-30V AC/DC 110-230V AC
Power MD22DUO24 MD22DUO230	max 0,6W max 3,5W
IP for over-desk part IP for under-desk part	IP 66/67 IP 20
Maximum thickness of desk	6 mm
Working temperature	-30...+70°C
Cross-sections of terminals	1x LY 0,34 – 0,75 mm ² 1x DY 0,34 – 1,0 mm ²
The length of the stripped wire	6 mm

The product conforms to the following standard PN-EN 60947-5-1.

TYPES OF LAMPS MD22DUO

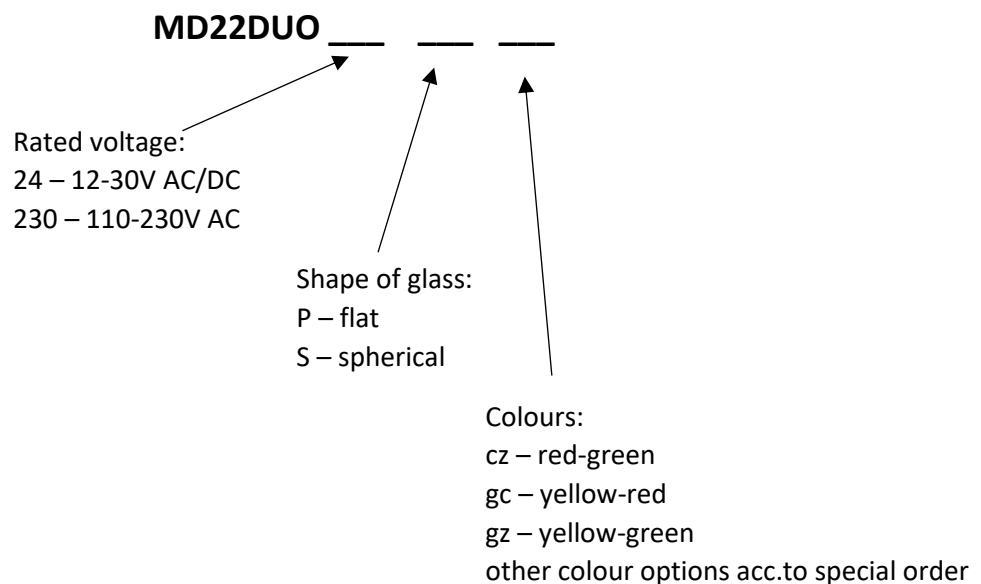

DIMENSIONS

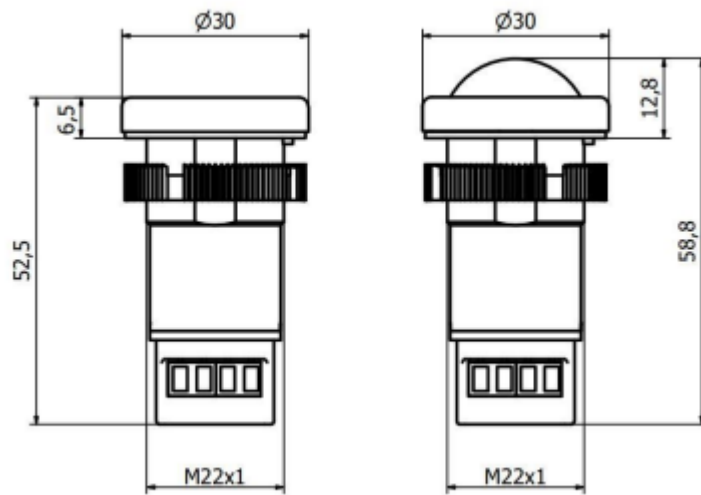

MD22DUO P

MD22DUO S